




WELTWEITER PARTNER
DER AUTOMOBILINDUSTRIE



PRO-TEC DPF Flushing Liquid Diesel Particle Filter - Flushing Liquid

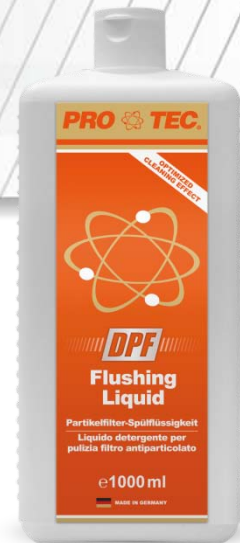

Product Properties

Particle Filter Flushing Liquid solves and removes all soot deposition and residues from the particle filter. The flushing liquid cleans gently and can be perfectly be used on all aluminum, magnesium, zinc and cadmium parts. The product can be used perfectly for the latest generation of particle filters.



Fields of application

Suitable for all diesel particle filters.



Application

1. Demount particle filter and seal one opening of the filter with a tape.
 2. Fill the flushing liquid into the particle filter
 3. Let the product work for about 10 hours and shake from time to time.
 4. After the cleaning process, thoroughly rinse the filter with clear warm water.
 5. Re-mount the particle filter, add DPF Super Clean and do a test drive of at least 20 minutes
- If regeneration does not start automatically driven by the engine electronic, start it with a garage probe.



Consumption per unit

Approximately 3 to 5 liters depending filter size



Working time

About 8 to 10 hours



Container Sizes

	Car / Truck	
	1 liters	5 liters
Art.-No.	6161	6162

Unsere Information stützt sich auf sorgfältige Untersuchungen und darf als zuverlässig gelten, dennoch kann sie nur unverbindlich beraten.

Service-Hotline
0700 - 77 63 32 01